


Flexit WB2 II series

WATERBLAST HOSE

Four wire spiral hose

APPLICATIONS

very high constant pressure hose for water and water emulsions scaling systems

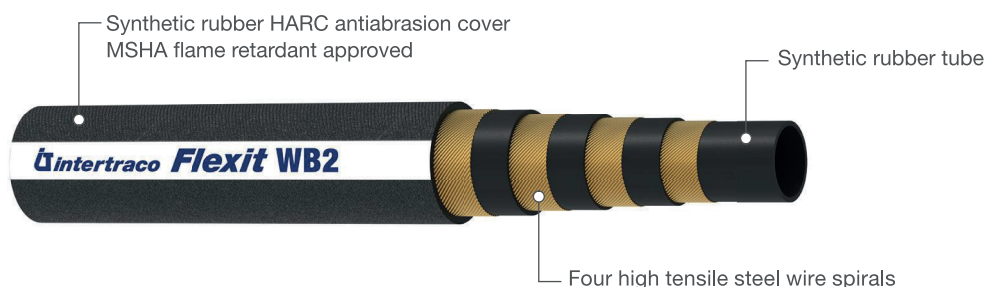

hose type	ø hose			reinforcement diameter		outside diameter		working pressure		burst pressure		bend radius		weight	
	dn	inch	size	mm	in	mm	in	bar	psi	bar	psi	mm	in	kg/m	lb/ft
WB2-06	10	3/8"	06	18,4	0,72	21,5	0,85	1250	18000	3125	45000	230	9,06	0,79	0,53
WB2-08	12	1/2"	08	21,5	0,85	24,1	0,95	1100	16000	2750	40000	230	9,06	1,10	0,74
WB2-12	19	3/4"	12	29,4	1,16	32,2	1,27	1000	14500	2500	36250	250	9,84	1,70	1,14

Water emulsions: -40 °C to +80 °C (-40 °F to +176 °F)

COMPATIBILITY CHART BETWEEN THIS HOSE AND INTERTRACO APPROVED FITTINGS

fitting type	assembling style	-03	-04	-05	-06	-08	--	-12	-16	-20	-24	-32	-40	-48
WATERBLAST														
		Interlock				W + SW4								

Snijders UHP B.V.

🏠 Jacobus Lipsweg 100
3316 BP Dordrecht

☎ +31 (0) 78 30 31 32 9
✉ info@snijdersuhp.nl

IBAN: NL82 RABO 0134 8669 91
BTW: NL8680.60.975.B01

KvK: 97460125
www.snijdersuhp.nl